



ICELINER

Now manufactured entirely in house and available in both minus 18 & minus 28 degree specs the Iceliner caters to the needs of the Temperature Controlled Freight market like never before. Shorter build lead times and increased design flexibility ensure your needs are more than satisfied.



- Full length lightweight chassis & full width skid plate protection address the needs of all operations




- Super Chiller, Freezer & Multi Temp specification available



- Complete sealing with enhanced exterior & internal finish are features of the locally manufactured design



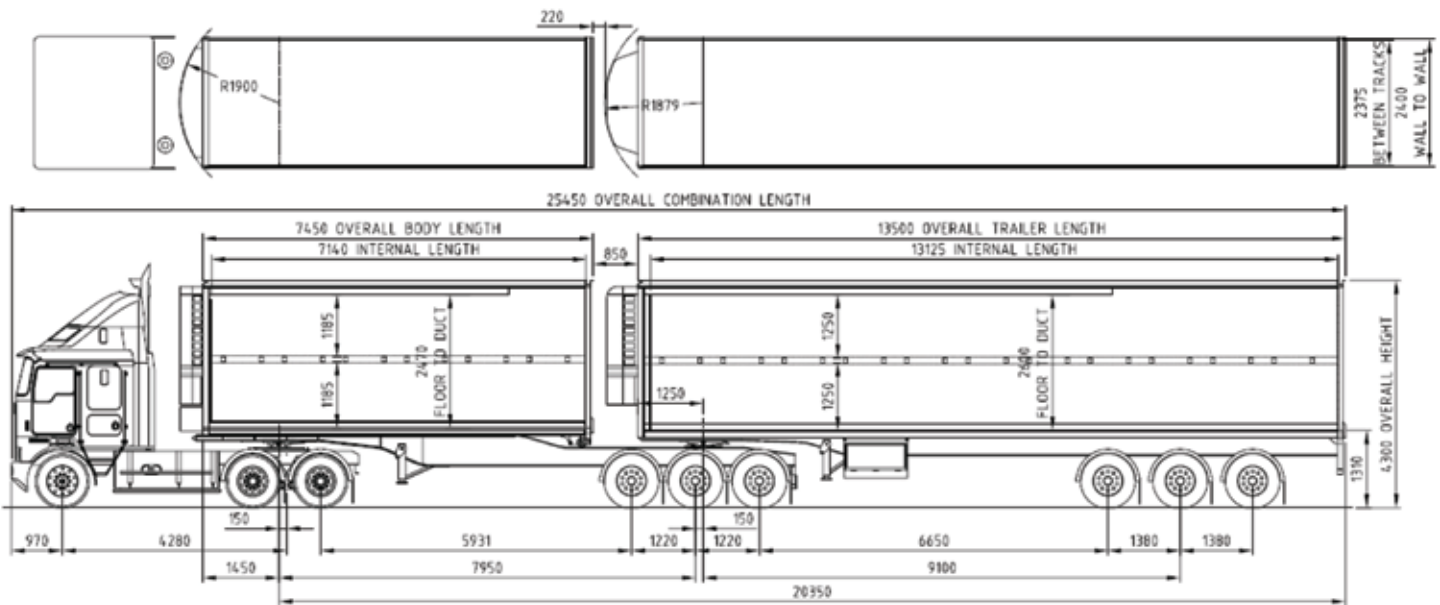

ICELINER SPECIFICATIONS (-28 DEGREES)

	A-TRAILER	B-TRAILER
Overall Length (mm)	7450	13500 (options available)
Overall Width (mm)	2500	2500
Overall Height (mm)	4300	4300
Coupling Height (mm)	1270	1270
Chassis	Light weight steel I beam construction with Vawdrey "Roll Back" body system	Light weight steel I beam construction
Skidplate	10mm fitted with 50mm king pin	10mm fitted with dual position 50mm king pin
Landing Legs	Jost Modul 2 speed (options available)	Jost Modul 2 speed (options available)
Suspension	Weweler air suspension (options available)	Weweler air suspension (options available)
Axles	Vawdrey 10 stud steel hub 285 PCD (options available)	Vawdrey 10 stud steel hub 285 PCD (options available)
Brakes	ADR approved drum (options available)	ADR approved drum (options available)
Mudguards	Radius plastic (options available)	Radius plastic (options available)
Wheels	10 stud steel 285 PCD (options available)	10 stud steel 285 PCD (Options available)
Tyres	11R22.5 (options available)	11R22.5 (options available)
Side Walls	40mm insulated with pallet protection (Optional Double Loader system)	40mm insulated with protection (Optional Double Loader system)
Front Wall	100mm Insulated with provision for fridge plant fitment	100mm Insulated with provision for fridge plant fitment
Rear	80mm insulated double rear door with four (4) stainless steel hinges, two (2) lockrods per door	80mm insulated double rear door with four (4) stainless steel hinges, two (2) lockrods per door
Floor	120mm insulated with fibre glass anti-slip (Options available)	120mm insulated with fibre glass anti-slip (Options available)
Roof	120mm insulated fibreglass	120mm insulated fibreglass
Lighting	Hella LED multi volt light to ADR specification	Hella LED multi volt light to ADR specification
Wiring	Heavy duty 5mm core wiring loom	Heavy duty 5mm core wiring loom
Paintwork	Chassis - silver enamel (options available) Body - White Gelcoat (Options available)	Chassis - silver enamel (options available) Body - White Gelcoat (Options available)