



LIVE FLOOR

The latest addition to the Vawdrey range addresses the needs of the bulk transport market. From transporting woodchips to waste, the Vawdrey "Bulkliner" can be configured to meet a wide range of industry needs. Constructed of hollow core aluminium extrusions,


the "Bulkliner" maximises existing volume for product, whilst maintaining a low tare weight. Available with a variety of roof, floor and door arrangements, the "Bulkliner" can be tailored to your industry needs in both single trailer and B-Double combinations.




- Front and side walls are constructed from interlocking, hollow core, extruded aluminium sections that are fully welded both internally and externally (optional painted finish displayed).



- Hallco "Live Floor" fitted as standard. Various options available to suit individual needs.

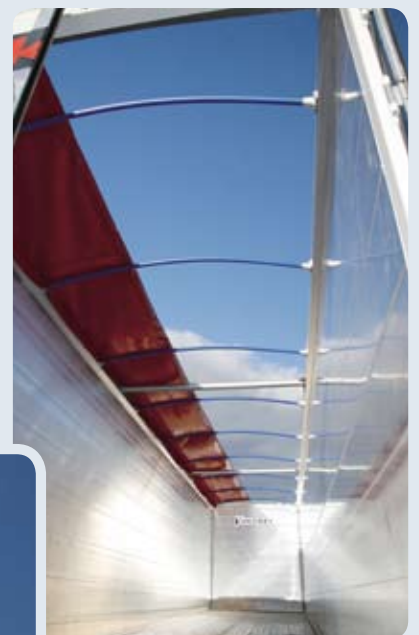

- Manually operated roller tarp roof as standard, with electric and tailored roof options available to suit specific requirements.

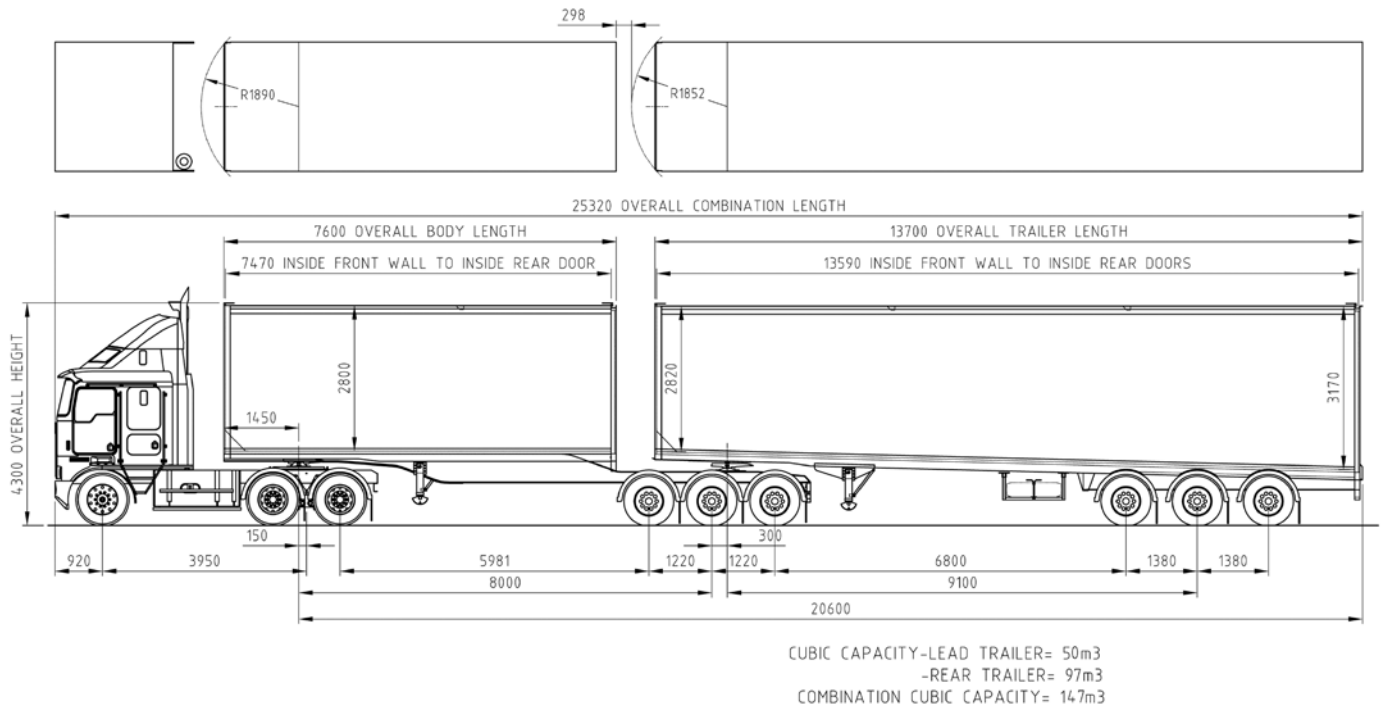

BULKLINER SPECIFICATIONS

	A-TRAILER	B-TRAILER
Overall Length (mm)	7600	13700 (options available)
Overall Width (mm)	2500	2500
Overall Height (mm)	4300	4300
Capacity (cubic metres)	50	97
Coupling Height (mm)	1270	1270
Chassis	Light weight steel I beam construction	Monocoque construction with extruded aluminium bottom rail fastened to crossmembers
Skid plate	10mm fitted with 50mm king pin	10mm fitted with dual position 50mm king pin
Landing Legs	Jost Modul 2 speed (options available)	Jost Modul 2 speed (options available)
Suspension	Weweler air suspension (options available)	Weweler air suspension (options available)
Axles	Vawdrey 10 stud steel hub 285 PCD (options available)	Vawdrey 10 stud steel hub 285 PCD (options available)
Brakes	ADR approved drum (options available)	ADR approved drum (options available)
Mudguards	Radius Plastic (options available)	Radius Plastic (options available)
Wheels	10 stud steel 285 PCD (options available)	10 stud steel 285 PCD (options available)
Tyres	11R22.5 (options available)	11R22.5 (options available)
Side Walls	Fully welded and interlocking extruded aluminium planks	Fully welded and interlocking extruded aluminium planks built to "Wedged" profile to maximise capacity
Front Wall	Fully welded and interlocking extruded aluminium planks	Fully welded and interlocking extruded aluminium planks
Rear	20mm FRP panel double rear doors (options available)	20mm FRP panel double rear doors (options available)
Floor	Hallco live floor with sealing extruded aluminium planks (options available)	Hallco live floor with sealing extruded aluminium planks (options available)
Roof	Manually operated roller tarp (options available)	Manually operated roller tarp (options available)
Lighting	Hella LED multi-volt light to ADR specifications	Hella LED multi-volt light to ADR specifications
Wiring	Heavy Duty 5mm core wiring loom	Heavy Duty 5mm core wiring loom
Paintwork	Chassis - one colour 2 pak	Chassis - one colour 2 pak
	Body - natural finish (painted as option)	Body - natural finish (painted as option)